

Compac Range




- Asynchronous single-phase motor with built-in thermal relay.
- Class F motor winding
- AISI 303 STAINLESS steel motor shaft.
- Single-impeller hydraulic system in NORYL



- IP X8 Protection Class
- All models have a 10 m H05 RNF power cable and Schuko plug
- Colour lithographed package
- All models are available in the automatic version with floating switch



- Suitable for clear water with a maximum temperature of 40°
- Max immersion depth: 9 m

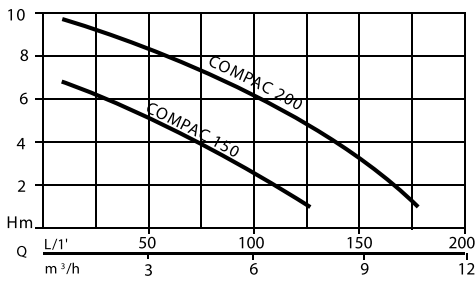

compac 150



integrated float switch

suitable for limited space

Draining level up to 3 mm

compac 200



Article	N1080030	N1080040
Barcode	8010583317176	8010583317183
Absorbed power	300 W	650 W
Max Head /pressurei	7 m / 0,7 bar	10 m / 1,0 bar
Flow rate	8500 l/h	11500 l/h
Voltage	230V - 50hz	230V - 50hz
Rated current	1.35A	2.9A
Max depth of immersion	9 m	9m
Max temperature of pumped fluid	40° C	40° C
Start / stop level	140mm/30mm	140mm/30mm
Pump Body	Polypropylène	Polypropylène
Minimum draining level	3 mm (man.) 30 mm (auto.)	3 mm (man.) 30 mm (auto.)
Max. size of impurities	5 mm	5 mm
Suction / delivery port	41,90 mm (1"1/4 M)	41,90 mm (1"1/4 M)
Accessories	Adjustable connector for threaded hoses Ø 25 and 32 mm hoses. Check valve	Adjustable connector for threaded hoses Ø 25 and 32 mm hoses. Check valve