


Multioil



- Totally enclosed fan-cooled motor
- Level of protection IPX4
- Cast iron pump casing, AISI 416 stainless steel shaft, brass impeller
- Pump inlet and outlet ports are 25 mm diameter
- Includes 4 m suction hose and 2 m discharge hose, fuel pistol, brass foot valve and filter.
- Suitable for agricultural, industrial and domestic use.

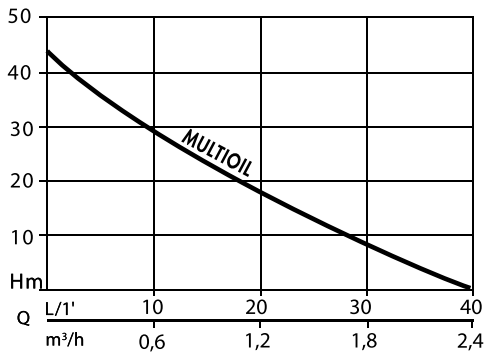

multioil

kit gasoil

brass impeller



Article	N4162030F1
Barcode	8010583343571
Absorbed power	550 W
Max Head / pressure	35 m ÷ 4 m
Flow rate	300 ÷ 2100 l/h
Pump body	Cast Iron
Max advised suction depth	5 m with foot valve
Voltage	230 V - 50 Hz
Rated currents	2.2 A
Suction port / Delivery port	33.25 mm (1")
Motor	Single - phase, continuous operation motor. External ventilation with always ON condenser
Max. temperature of water	35° C
Accessories	Includes 4 m suction hose and 2 m discharge hose with fuel pistol, brass foot valve and filter