




SURFACE MOUNTED PUMPS

CM DIN 24255

Dimensions (mm)				
DN	D	K	Holes n°	Dia.
32	140	100	4	18
40	150	110	4	18
50	165	125	4	18
65	185	145	4	18
80	200	160	8	18
100	220	180	8	18
125	250	210	8	18







Model		Dimensions (mm)															Weight Kg													
		DNM	DNA	A	H ₁	H ₂	M ₁	M ₂	N ₁	N ₂	D	E	Ø	B	C	H														
CM 32/160	C	32	50	80	132	160	100	70	240	190	50	12	14	490	240	292	41													
	B																	44												
	A																	47												
CM 32/200	C					160	180								505	268	340	57												
	B											565	72																	
	A											625	305	405	102															
CM 32/250	C					100	180	225	125	95	320	250	65	14	14	695	305	405	106											
	B																						136							
	A																													
CM 40/125	C	40	65	80	112	140	100	70	210	160	50	12	14	495	220	252	42													
	B																	44												
	A																	48												
CM 40/160	B					132	160			240	190	50	15	14	500	245	292	52												
	A																57													
	B							160	180								265	212	65	15	14	590	273	340	75					
CM 40/200	B					100	180					320	250	65	15	14						630	322	405	101					
	A																													
	B																													
CM 40/250	B			180	225	125	95	320	250	65	15	14	14	630	322	405	101													
	A																													
	B																													
CM 50/125	B	50	65	100	132	160	100	70	240	190	50	12	14	525	250	292	54													
	A																													
	B													160	180			265	212	65	14	14	590	270	340	75				
CM 50/160	B					100	160	200			320	250	65			14	14						635	290	360	90				
	A																													
	B																													
CM 50/200	C					160	200			265	212	65	14	14	635	290	360	103												
	B																													
	A																													
CM 50/250	C			180	225	125	95	320	250	65	14	14	705	332	405	139														
	B																													
	A																													
CM 65/125	B	65	80	100	160	180	125	95	280	212	65	14	14	605	280	340	77													
	A																													
	C														200			320	250	65	14	14	635	290	360	100				
CM 65/160	B					100	180	225			320	250	65	14		14	705						330	405	104					
	A																													
	C																													
CM 65/200	C					180	225			320	250	65	14	14	705	330	405	139												
	B																													
	A																													
CM 65/250	B			200	250	160	120	360	280	80	16	19	850	370	450	204														
	A																													
	B																													
CM 80/160	D	80	100	125	180	225	125	95	320	250	65	14	14	665	330	405	114													
	C																													
	B																													
CM 80/200	A															780	355	405	158											
	B															870			200											
	A															222														
CM 100/160 CM 100/160	B	100	125	125	200	280	160	120	360	280	80	18	18	842	390	480	208													
	A																													

SURFACE MOUNTED PUMPS

CM 32

E

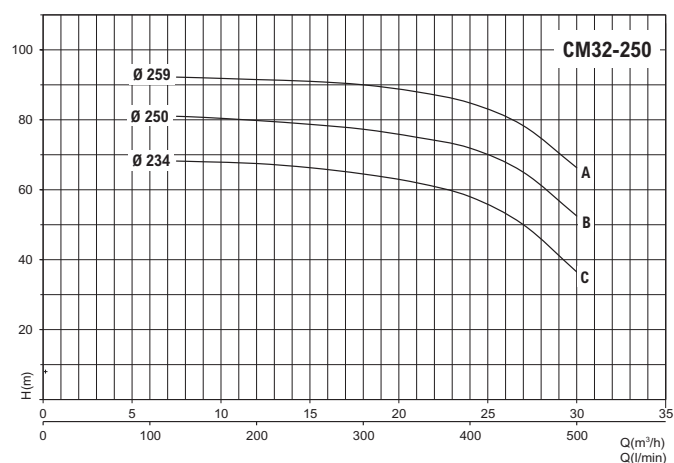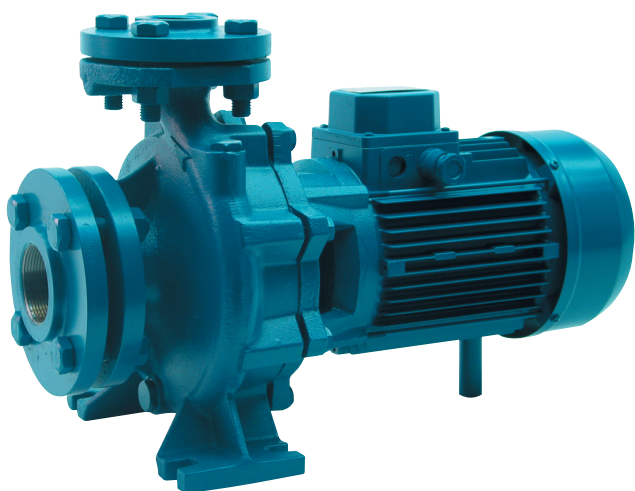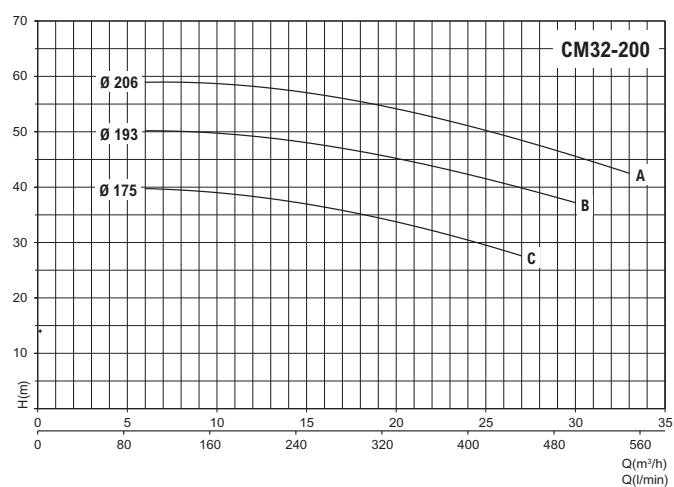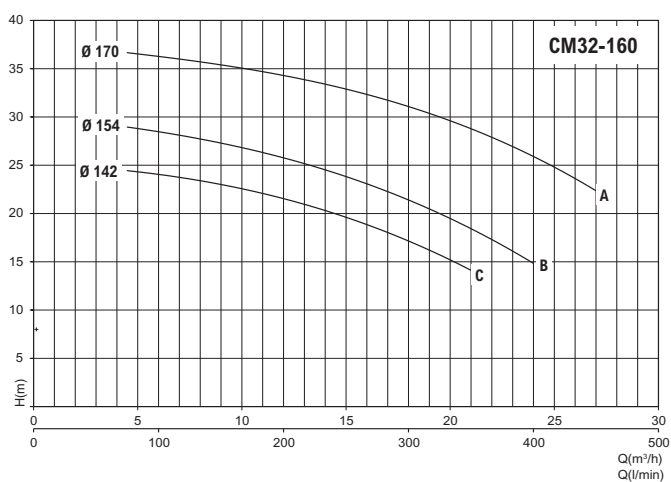

MODEL	MOTOR POWER		VOLTAGE	AMP 3 x 400 V	CODE
	HP	Kw			
CM 32/160 C	2	1.5	3 ~ 230 ÷ 400 V	3.6	573-2KKK
CM 32/160 B	3	2.2	3 ~ 230 ÷ 400 V	4.9	573-3KKK
CM 32/160 A	4	3	3 ~ 230 ÷ 400 V	6.8	573-4KKK
CM 32/200 C	5.5	4	3 ~ 230 ÷ 400 V	8.9	573-5KKK
CM 32/200 B	7.5	5.5	3 ~ 400 ÷ 690 V	11.1	573-7KKK
CM 32/200 A	10	7.5	3 ~ 400 ÷ 690 V	14.1	573-9KKK
CM 32/250 C	12.5	9.2	3 ~ 400 ÷ 690 V	16.8	574-0KKK
CM 32/250 B	15	11	3 ~ 400 ÷ 690 V	20.0	574-1KKK
CM 32/250 A	20	15	3 ~ 400 ÷ 690 V	23.2	574-2KKK