

SUBMERSIBLE PUMPS

ABS ROBUSTA

E



The Robusta 200 and 300 series have been designed for fixed or portable installation and for internal or external applications such as emptying containers, drainage pits, draining of swimming pools or flooded cellars. Robusta is fitted with an automatic level control. The Hand-Auto switch can be set to manual operation. A check valve built into the discharge outlet blocks return-flow from the discharge line when the pump is switched off. 10m power cable. 1¼" bsp reducing hose adapter - 1" hose - ¾" bsp - ¾" hose

Features

Max Solids 10mm
Built In Non Return Valve

Applications

Clean & Dirty Water
Residue Water

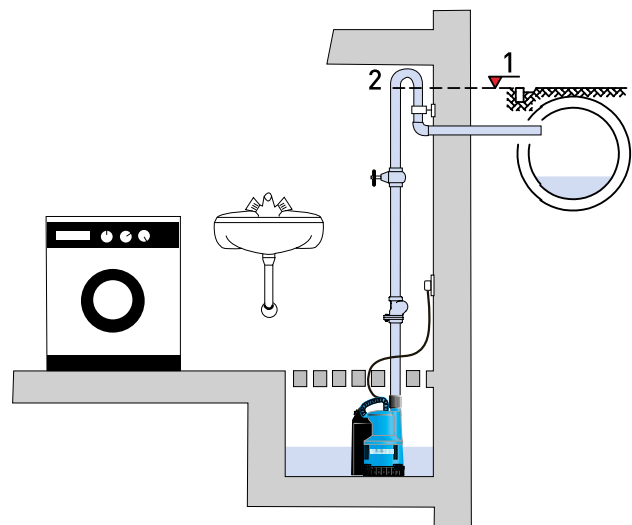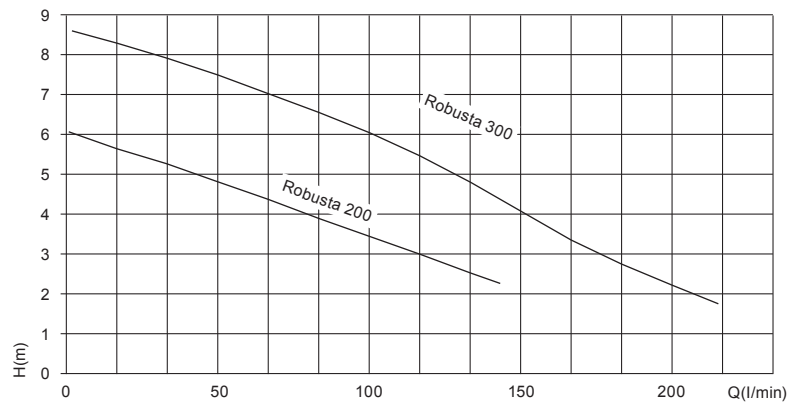

1. Backwash level
2. Backwash loop with base above the backwash level

Auto Switching Levels

Robusta 200
On At 145mm / Off At 50mm
Robusta 300
On At 165mm / Off At 75mm

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE
ROBUSTA 200	230v	1¼"	140/6	0.36	1.6	304 x 157 x 195	3.8	020-785
ROBUSTA 300	230v	1¼"	215/8.5	0.5	2.2	324 x 157 x 195	4.4	020-788