

SUBMERSIBLE PUMPS

PENTAX DTR/DTRT HIGH HEAD GRINDER

E


Free standing or can be guide rail mounted. Side horizontal outlet, twin mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber. Used for domestic and industrial applications where either high heads or long distances prohibit the use of standard submersible or large bore discharge pipe is not available or uneconomical to install. Single phase models have external capacitor supplied loose. Maximum immersion 20m. Complete with 10m power cable. All models can be made to work automatically, see pages 78-81 for control panels and 85-89 for float switches.

Features

Cast Iron Pump Body
Cast Iron Impeller
Max Solids 3mm

Applications

Heavy Duty
Sewage

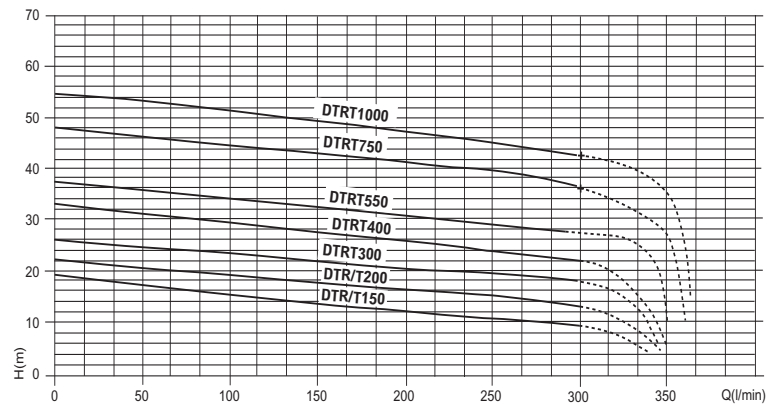

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE
DTR 150	230v	2"	300/19	1.1	11.5	513 x 237 x 291	35	020-650
DTR 200	230v	2"	300/22	1.5	13.6	513 x 237 x 291	36	020-652
DTRT 150	400v	2"	300/19	1.1	4.4	513 x 237 x 291	35	020-654
DTRT 200	400v	2"	300/22	1.5	5.1	513 x 237 x 291	36	020-656
DTRT 300	400v	2"	300/26	2.2	5.8	513 x 237 x 291	37	020-658
DTRT 400	400v	DN50	350/33	3	7.5	595 x 237 x 350	59	020-660
DTRT 550	400v	DN50	350/38	4	9.2	595 x 237 x 350	66	020-662
DTRT 750	400v	DN65	360/47	5.5	13.9	680 x 279 x 430	94	020-664
DTRT 1000	400v	DN65	360/54	7.5	15.5	680 x 279 x 430	97	020-666
DN50 COUNTER FLANGE KIT								M62222221
DN65 COUNTER FLANGE KIT								M62222222