

# SUBMERSIBLE PUMPS

## OLIJU SGR SEWAGE GRINDER PUMPS

E


Oliju SGR submersible grinder pumps are suitable for domestic and light commercial sewage waste containing soft solids that the grinding system will shred it into smaller pieces and be pumped to waste. Can be installed free standing or installed with guide rail set ups. Double mechanical silicon seals. Motor casting, pump body and open impeller in cast iron. Stainless steel shaft. Maximum liquid temperature 35°C. 10m power cable for SGR40 and 20m power cable for SGR50. Single phase pumps complete with capacitor/overload box. Maximum immersion depth 10m.

### Features

Grinder  
High Head

### Applications

Waste Water  
Domestic Sewage  
Light Commercial

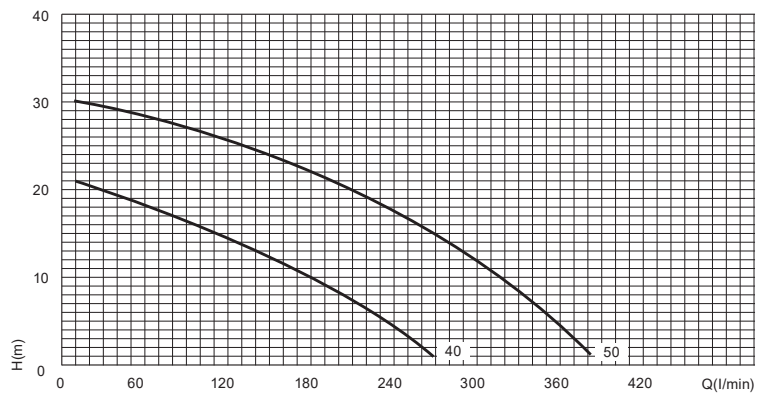

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE
SGR 40.150 MANUAL	230v	1½"	250/21	1.5	7.2	402 x 238 X 238	26.5	1200-0005
SGR 40.150 AUTO	230v	1½"	250/21	1.5	7.2	402 x 238 X 238	26.5	1200-0010
SGR 50.220 MANUAL	230v	2"	380/30	2.2	10	470 x 288 X 294	36	1200-0015
SGR 50.220 AUTO	230v	2"	380/30	2.2	10	470 x 288 X 294	36	1200-0020
SGR 40.150	400v	2"	250/21	1.5	2.1	402 x 288 X 238	26.5	1200-0025
SGR 50.220	400v	2"	380/30	2.2	4.6	470 x 288 X 294	36	1200-0030
SGR40-BA50 ADAPTER FLANGE	-	2"	-	-	-	-	1.9	1200-0420