

SUBMERSIBLE PUMPS

DRENO COMPATTA PRO VORTEX PUMPS

E


The main components are fabricated in cast iron GG20, in the standard configuration a lip seal is fitted to the motor side, and a mechanical seal to the impeller side. The Compatta PRO Series is ideal to pump sewage and waste tanks to its small size and mechanical characteristics. The pumps with EX can be used in potentially explosive environments. Maximum liquid temperature 40°C. Maximum depth of immersion 20 metres. Power cable 10 metres.

Features

- Cast Iron Pump Body
- Cast Iron Impeller
- Max Solids 50mm

Applications

- Heavy Duty
- Sewage
- Dirty Water

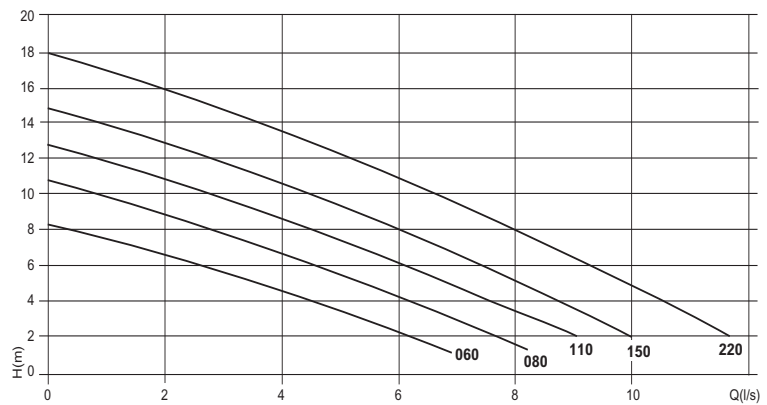

II 2G
Ex db IIB T4 Gb
EX h IIB T4 Gb
0° ≤ Ta ≤ 40°

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE
COMPATTA PRO 50-2/150 M	230v	2"	420/8	1.5	9.6	409x186x240	25	200-0038
COMPATTA PRO 50-2/220 T	400v	2"	420/8	2.2	5.2	409x186x240	25	200-0040
COMPATTA PRO 50-2/150 T	400v	2"	420/8	1.5	3.7	409x186x240	25	200-0540
COMPATTA PRO-EX 50-2/060 M	230v	2"	480/10	0.6	4.8	400x175x225	24	200-0020EX
COMPATTA PRO-EX 50-2/060 T	400v	2"	480/10	0.6	2.1	400x175x225	24	200-0022EX
COMPATTA PRO-EX 50-2/080 M	230v	2"	480/10	0.8	5.8	399x175x225	24	200-0026EX
COMPATTA PRO-EX 50-2/080 T	400v	2"	510/13	0.8	2.4	399x175x225	24	200-0028EX
COMPATTA PRO-EX 50-2/110 M	230v	2"	510/13	1.1	7.4	444x176x226	24	200-0032EX
COMPATTA PRO-EX 50-2/110 T	400v	2"	510/13	1.1	2.9	444x176x226	24	200-0034EX
COMPATTA PRO-EX 50-2/150 M	230v	2"	540/15	1.5	9.6	409x186x240	25	200-0038EX
COMPATTA PRO-EX 50-2/150 T	400v	2"	540/15	1.5	3.7	409x186x240	25	200-0540EX
COMPATTA PRO-EX 50-2/220 T	400v	2"	540/18	2.2	5.2	409x186x240	25	200-0040EX