

SUBMERSIBLE PUMPS

DRENO – AT SINGLE CHANNEL IMPELLER (2 POLE)

E


All main components are made of grey cast iron GG25. Two individual mechanical seals (motor side in the oil chamber, impeller side in contact with the liquid). The A2 poles Series is used in pumping and draining clear liquids and sewage. High performance renders it useful in a variety of applications: water treatment plants, industrial plants, farms and sewers. The A series is fitted with open single channel and highly efficient impellers. The shredding system ensures a high degree of reliability even in presence of fibrous materials and solids in suspension. Maximum liquid temperature 40°C. Maximum immersion 20 metres. Complete with 10 metres power cable.

Features

Cast Iron Pump Body
Cast Iron Impeller
Max Solids C.246 C.247 45mm
C.254 C.257 60mm
C.259 65mm

Applications

Heavy Duty
Sewage
Dirty Water

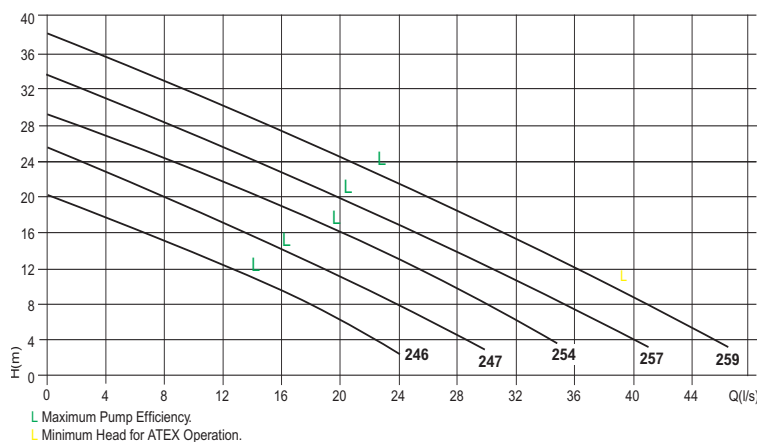

II 2G
Ex db IIB T4 Gb
EX h IIB T4 Gb
0° ≤ Ta ≤ 40°

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE
AT80-C.246	400v	DN80	1440/20	3	7.1	528 x 244 x 340	60	200-0115
AT80-C.246 EX	400v	DN80	1440/20	3	7.1	528 x 244 x 340	60	200-0115EX
AT80-C.247	400v	DN80	1800/26	4	9	528 x 244 x 340	60	200-0113
AT80-C.247 EX	400v	DN80	1800/26	4	9	528 x 244 x 340	60	200-0113EX
AT80-C.254	400v	DN80	2160/29	5.5	11.5	608 x 244 x 340	84	200-0109
AT80-C.254 EX	400v	DN80	2160/29	5.5	11.5	608 x 244 x 340	84	200-0109EX
AT80-C.257	400v	DN80	2520/34	7.5	14.5	608 x 244 x 368	88	200-0118
AT80-C.257 EX	400v	DN80	2520/34	7.5	14.5	608 x 244 x 368	88	200-0118EX
AT80-C.259	400v	DN80	2760/38	9	18.5	608 x 244 x 368	90	200-0135
AT80-C.259 EX	400v	DN80	2760/38	9	18.5	608 x 244 x 368	90	200-0135EX