

SEWAGE & WASTE

DRENO ATH TWIN CHANNEL IMPELLER (2 POLE)

E


All main components are made of grey cast iron GG25. Two individual mechanical seals, motor side in the oil chamber, impeller side in contact with the liquid) and high quality parts, ensure the perfect functioning and reliability of the product. The A 2 poles Series is used in pumping and draining clear liquids and sewage. High performance renders it useful in a variety of applications, water treatment plants, industrial plants, farms and sewers. The A series is fitted with open single channel and highly efficient impellers. The shredding system ensures a high degree of reliability even in presence of fibrous materials and solids in suspension. Maximum 40°C liquid temperature. Maximum immersion 20 metres. Complete with 10 metres of power cable.

Features

Cast Iron Pump Body
Cast Iron Impeller
Max Solids 120/150 33mm
200/250/300 40mm

Applications

Heavy Duty
Sewage
Dirty Water

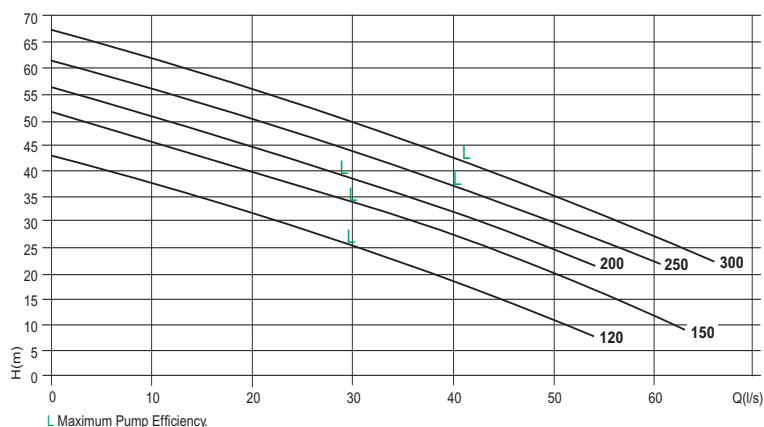

II 2G
Ex db IIB T4 Gb
EX h IIB T4 Gb
0° ≤ Ta ≤ 40°

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE
ATH 80-2/120	400v	DN80	3240/41	12	23	700 x 364 x 507	190	200-0124
ATH 80-2/120 EX	400v	DN80	3240/41	12	23	700 x 364 x 507	190	200-0124EX
ATH 80-2/150	400v	DN80	3720/49	15	29.4	700 x 364 x 507	200	200-0126
ATH 80-2/150 EX	400v	DN80	3720/49	15	29.4	700 x 364 x 507	200	200-0126EX
ATH 80-2/200	400v	DN80	3240/55	20	41.2	741 x 364 x 507	247	200-0123
ATH 80-2/200 EX	400v	DN80	3240/55	20	41.2	741 x 364 x 507	247	200-0123EX
ATH 80-2/250	400v	DN80	3600/60	25	48.4	741 x 364 x 532	250	200-0125
ATH 80-2/250 EX	400v	DN80	3600/60	25	48.4	741 x 364 x 532	250	200-0125EX
ATH 80-2/300	400v	DN80	3900/62	30	54.4	808 x 364 x 531	393	200-0127
ATH 80-2/300 EX	400v	DN80	3900/62	30	54.4	808 x 364 x 531	393	200-0127EX