

SEWAGE & WASTE

DRENO VTH VORTEX IMPELLER (2 POLE)

E


All main components are made of grey cast iron GG25. Two individual mechanical seals (motor side in the oil chamber, impeller side in contact with the liquid) and high quality parts, ensure the perfect functioning and reliability of the product. The VTH 2 poles Series is used for pumping sewage with suspended solids. High performance renders it useful in a variety of applications including water treatment plants, industrial plants, farming and sewage. Vortex Impellers give ample solids handling. Maximum 40°C liquid temperature. Maximum immersion 20 metres. Complete with 10 metres of power cable.

Features

Cast Iron Pump Body
Cast Iron Impeller
Max Solids 70mm

Applications

Heavy Duty
Sewage
Dirty Water

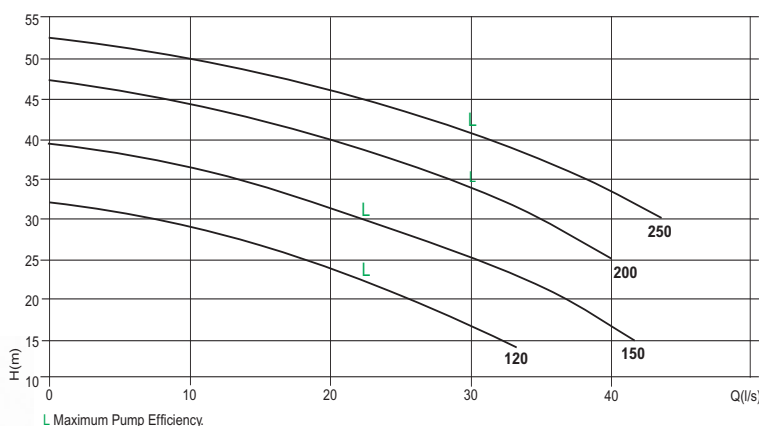

II 2G
Ex db IIB T4 Gb
EX h IIB T4 Gb
0° ≤ Ta ≤ 40°

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE
VTH 80-2/120	400v	DN80	1950/32	12	22.0	699 x 364 x 507	190	200-0128
VTH 80-2/120 EX	400v	DN80	1950/32	12	22.0	699 x 364 x 507	190	200-0128EX
VTH 80-2/150	400v	DN80	2460/39	15	29.5	699 x 364 x 507	200	200-0130
VTH 80-2/150 EX	400v	DN80	2460/39	15	29.5	699 x 364 x 507	200	200-0130EX
VTH 80-2/200	400v	DN80	2400/44	20	41.0	728 x 364 x 532	242	200-0129
VTH 80-2/200 EX	400v	DN80	2400/44	20	41.0	728 x 364 x 532	242	200-0129EX
VTH 80-2/250	400v	DN80	2580/54	25	47.5	728 x 364 x 532	244	200-0131
VTH 80-2/250 EX	400v	DN80	2580/54	25	47.5	728 x 364 x 532	244	200-0131EX