

SEWAGE & WASTE

DRENO VM/VT VORTEX IMPELLER (4 POLE)

E


All main components are made of grey cast iron GG25. Two individual mechanical seals (motor side in the oil chamber, impeller side in contact with the liquid) and high quality parts, ensure the perfect functioning and reliability of the product. The VT 4 poles Series is used for transport of water with heavy suspended solids. High performance and a wide channel permits its use in industry, including tanneries and farms, and for the movement of water contaminated with soil, or containing large solid pieces. Vortex Impellers give ample solids handling. Maximum 40°C liquid temperature. Maximum immersion 20 metres. Complete with 10 metres of power cable.

Features

Cast Iron Pump Body
Cast Iron Impeller
Max Solids 341/342 75mm
344/345 80mm

Applications

Heavy Duty
Sewage
Dirty Water

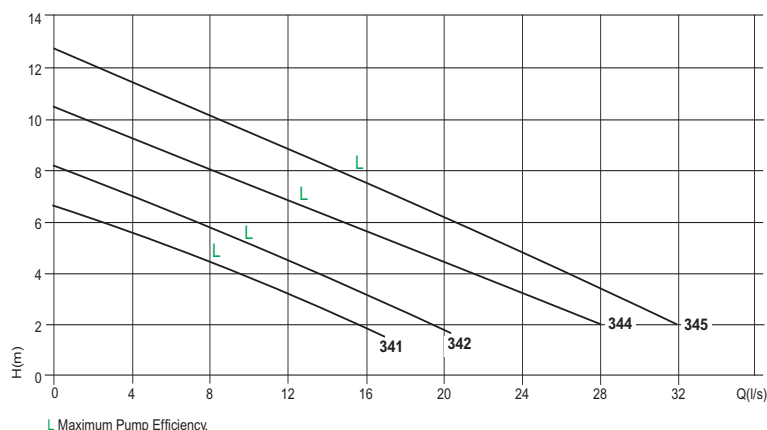

II 2G
Ex db IIB T4 Gb
EX h IIB T4 Gb
0° ≤ Ta ≤ 40°

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE
VM 80-C.341	230v	DN80	1020/6.5	1.1	7.3	453 x 290 x 323	46	200-0142
VM 80-C.341 EX	230v	DN80	1020/6.5	1.1	7.3	453 x 290 x 323	46	200-0142EX
VM 80-C.342	230v	DN80	1230/8	1.25	8.7	453 x 290 x 323	47	200-0146
VM 80-C.342 EX	230v	DN80	1230/8	1.25	8.7	453 x 290 x 323	47	200-0146EX
VT 80-C.341	400v	DN80	1020/6.5	1.1	2.8	453 x 290 x 323	46	200-0140
VT 80-C.341 EX	400v	DN80	1020/6.5	1.1	2.8	453 x 290 x 323	46	200-0140EX
VT 80-C.342	400v	DN80	1230/8	1.25	3.2	453 x 290 x 323	47	200-0144
VT 80-C.342 EX	400v	DN80	1230/8	1.25	3.2	453 x 290 x 323	47	200-0144EX
VT 80-C.344	400v	DN80	1680/10	2.2	5.2	528 x 314 x 385	68	200-0156
VT 80-C.344 EX	400v	DN80	1680/10	2.2	5.2	528 x 314 x 385	68	200-0156EX
VT 80-C.345	400v	DN80	1920/12.5	3.0	7.2	528 x 314 x 385	69	200-0158
VT 80-C.345 EX	400v	DN80	1920.12.5	3.0	7.2	528 x 314 x 385	69	200-0158EX