

SEWAGE & WASTE

DRENO VT VORTEX IMPELLER (4 POLE)

E


All main components are made of grey cast iron GG25. Two individual mechanical seals (motor side in the oil chamber, impeller side in contact with the liquid) and high quality parts, ensure the perfect functioning and reliability of the product. The VT 4 poles Series is used for transport of water with heavy suspended solids. High performance and a wide channel permits its use in industry, including tanneries and farms, and for the movement of water contaminated with soil, or containing large solid pieces. Vortex Impellers give ample solids handling. Maximum 40°C liquid temperature. Maximum immersion 20 metres. Complete with 10 metres of power cable.

Features

Cast Iron Pump Body
Cast Iron Impeller
Max Solids 348/349/350 100mm
355/356/358 90mm

Applications

Heavy Duty
Sewage
Dirty Water

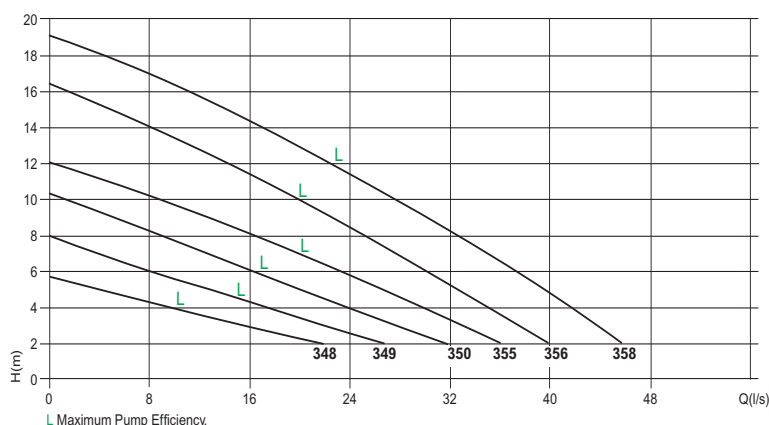

II 2G
Ex db IIB T4 Gb
EX h IIB T4 Gb
0° ≤ Ta ≤ 40°

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE
VT 100-C.348	400v	DN100	1320/5.5	1.7	3.9	549 x 338 x 405	70	200-0165
VT 100-C.348 EX	400v	DN100	1320/5.5	1.7	3.9	549 x 338 x 405	70	200-0165EX
VT 100-C.349	400v	DN100	1620/8	2.2	5.2	549 x 338 x 405	71	200-0166
VT 100-C.349 EX	400v	DN100	1620/8	2.2	5.2	549 x 338 x 405	71	200-0166EX
VT 100-C.350	400v	DN100	1920/10	3.0	7.2	549 x 338 x 405	74	200-0168
VT 100-C.350 EX	400v	DN100	1920/10	3.0	7.2	549 x 338 x 405	74	200-0168EX
VT 100-C.355	400v	DN100	2160/12	4.0	9.2	609 x 375 x 470	95	200-0174
VT 100-C.355 EX	400v	DN100	2160/12	4.0	9.2	609 x 375 x 470	95	200-0174EX
VT 100-C.356	400v	DN100	2400/16	6.0	12.5	609 x 375 x 470	99	200-0176
VT 100-C.356 EX	400v	DN100	2400/16	6.0	12.5	609 x 375 x 470	99	200-0176EX
VT 100-C.358	400v	DN100	2760/18.5	7.5	15.5	609 x 375 x 470	125	200-0177
VT 100-C.358 EX	400v	DN100	2760/18.5	7.5	15.5	609 x 375 x 470	125	200-0177EX