

SEWAGE & WASTE

DRENO VT VORTEX IMPELLER (4 POLE)

E


All main components are made of grey cast iron GG25. Two individual mechanical seals (motor side in the oil chamber, impeller side in contact with the liquid) and high quality parts, ensure the perfect functioning and reliability of the product. The VT 4 poles Series is used for transport of water with heavy suspended solids. High performance and a wide channel permits its use in industry, including tanneries and farms, and for the movement of water contaminated with soil, or containing large solid pieces. Vortex Impellers give ample solids handling. Maximum 40°C liquid temperature. Maximum immersion 20 metres. Complete with 10 metres of power cable.

Features

Cast Iron Pump Body
Cast Iron Impeller
Max Solids 90mm

Applications

Heavy Duty
Sewage
Dirty Water

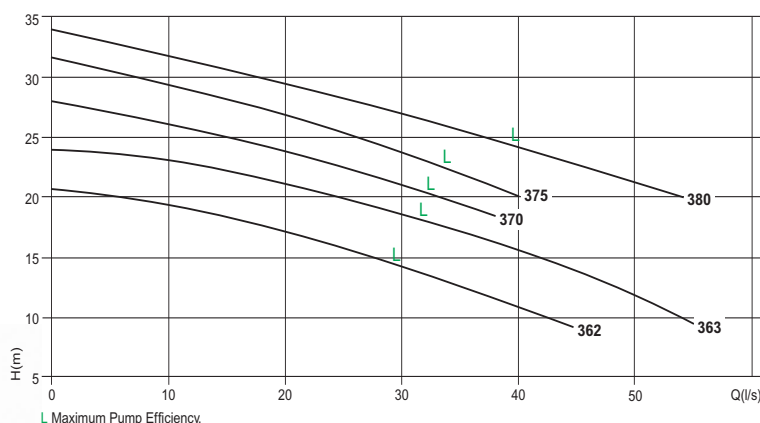

II 2G
Ex db IIB T4 Gb
EX h IIB T4 Gb
0° ≤ Ta ≤ 40°

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE
VT 100-C.362	400v	DN100	2700/20	12.0	23.8	730 x 385 x 480	192	200-0182
VT 100-C.362 EX	400v	DN100	2700/20	12.0	23.8	730 x 385 x 480	192	200-0182EX
VT 100-C.363	400v	DN100	3300/23	15.0	30.4	730 x 385 x 480	205	200-0184
VT 100-C.363 EX	400v	DN100	3300/23	15.0	30.4	730 x 385 x 480	205	200-0184EX
VT 100-C.370	400v	DN100	2400/28	18.0	36.2	794 x 507 x 504	284	200-1330
VT 100-C.370 EX	400v	DN100	2400/28	18.0	36.2	794 x 507 x 504	284	200-1330EX
VT 100-C.375	400v	DN100	2400/31	20.0	41.0	794 x 507 x 504	290	200-0190
VT 100-C.375 EX	400v	DN100	2400/31	20.0	41.0	794 x 507 x 504	290	200-0190EX
VT 100-C.380	400v	DN100	3240/34	25.0	50.8	794 x 507 x 504	295	200-0192
VT 100-C.380 EX	400v	DN100	3240/34	25.0	50.8	794 x 507 x 504	295	200-0192EX