




SURFACE MOUNTED PUMPS

CM DIN 24255

Dimensions (mm)				
DN	D	K	Holes n°	Dia.
32	140	100	4	18
40	150	110	4	18
50	165	125	4	18
65	185	145	4	18
80	200	160	8	18
100	220	180	8	18
125	250	210	8	18








Model		Dimensions (mm)															Weight Kg						
		DNM	DNA	A	H ₁	H ₂	M ₁	M ₂	N ₁	N ₂	D	E	Ø	B	C	H							
CM 32/160	C	32	50	80	132	160	100	70	240	190	50	12	14	490	240	292	41						
	B																44						
	A																47						
CM 32/200	C			32	50	80	160	180	100	70	240	190	50	12	14	505	268	340	57				
	B																			72			
	A																			79			
CM 32/250	C					32	50	80	160	180	100	70	240	190	50	12	14	505	268	340	57		
	B																					72	
	A																					79	
CM 32/250	C	32	50					100	180	225	125	95	320	250	65	14	14	625	305	405	102		
	B																					106	
	A																					136	
CM 40/125	C			40	65			80	112	140	100	70	210	160	50	12	14	495	220	252	42		
	B																						44
	A																						48
CM 40/160	B					40	65	80	132	160	100	70	240	190	50	12	14	500	245	292	52		
	A																						57
	B																						75
CM 40/200	B	40	65					100	160	180	100	70	265	212	65	15	14	590	273	340	81		
	A																						81
	B																						101
CM 40/250	B			40	65			100	180	225	125	95	320	250	65	15	14	630	322	405	101		
	A																	700			135		
	B																					54	
CM 50/125	B					50	65	100	132	160	100	70	240	190	50	12	14	525	250	292	54		
	A																						58
	B																						75
CM 50/160	B	50	65					100	160	180	100	70	265	212	50	12	14	590	270	340	81		
	A																						81
	B																						90
CM 50/200	C			50	65			100	160	200	100	70	265	212	50	12	14	635	290	360	103		
	B																						103
	A																						133
CM 50/250	C					50	65	100	160	200	100	70	265	212	50	12	14	705	290	360	139		
	B																						139
	A																						154
CM 50/250	C	50	65					100	180	225	125	95	320	250	65	14	14	750	332	405	164		
	B																						164
	A																						204
CM 65/125	B			65	80			100	160	180	125	95	280	212	65	14	14	605	280	340	77		
	A																						83
	C																						100
CM 65/160	C					65	80	100	160	200	125	95	280	212	65	14	14	635	290	360	104		
	B																						104
	A																						135
CM 65/200	C	65	80					100	180	225	125	95	320	250	65	14	14	705	330	405	139		
	B																						139
	A																						153
CM 65/250	C			65	80			100	180	225	125	95	320	250	65	14	14	750	330	405	164		
	B																						164
	A																						204
CM 65/250	B					65	80	100	200	250	160	120	360	280	80	16	19	850	370	450	226		
	A																						226
	C																						204
CM 80/160	D	80	100					125	180	225	125	95	320	250	65	14	14	665	330	405	114		
	C																	735			143		
	B																	780			158		
CM 80/200	B			80	100			125	180	225	125	95	345	280	65	16	14	870	355	405	200		
	A																				222		
	B																				208		
CM 100/160 CM 100/160	B					100	125	125	200	280	160	120	360	280	80	18	18	842	390	480	208		
	A																				231		

SURFACE MOUNTED PUMPS

CM 40

E

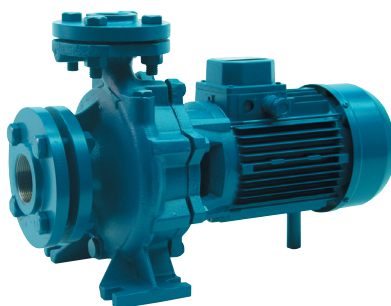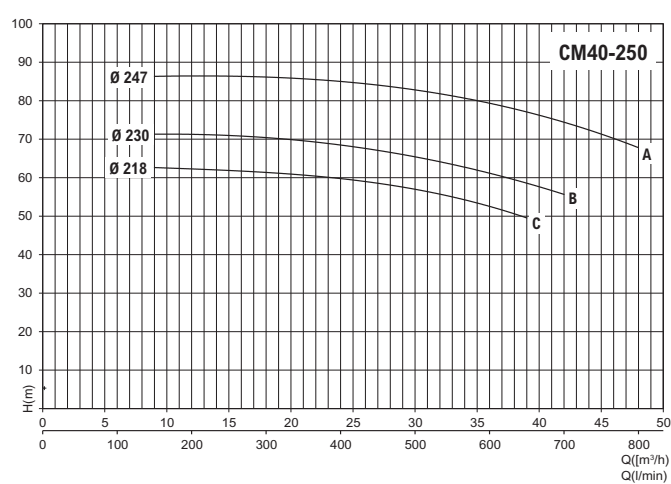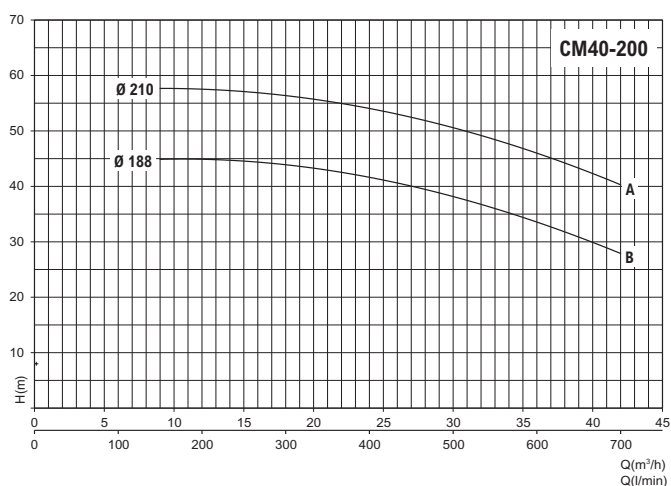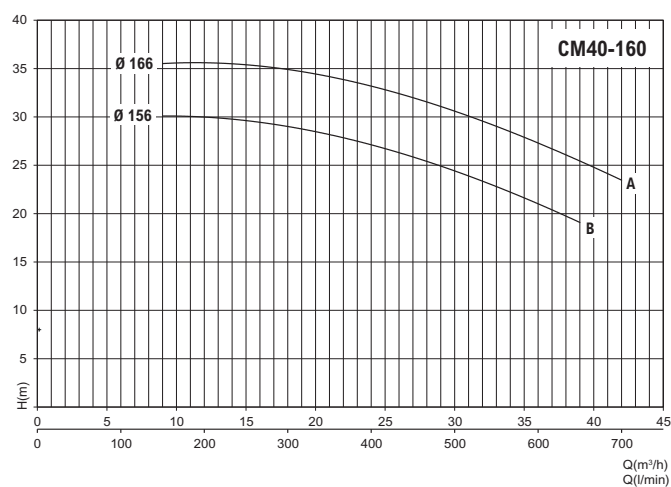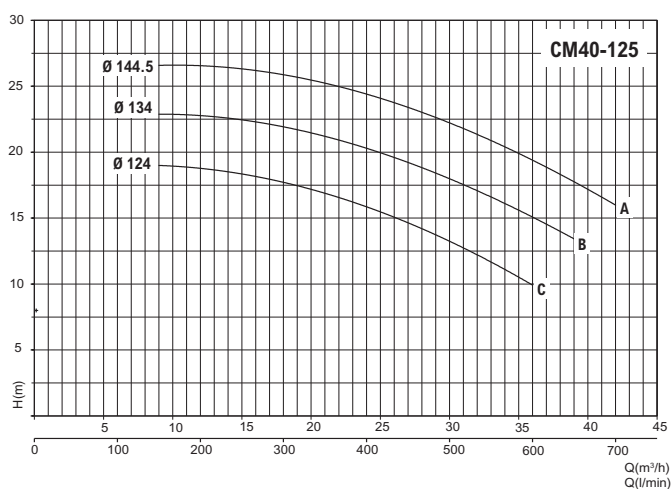

MODEL	MOTOR POWER		VOLTAGE	AMP 3 x 400 V	CODE
	HP	Kw			
CM 40/125 C	2	1.5	3 ~ 230 ÷ 400 V	3.6	577-0KKK
CM 40/125 B	3	2.2	3 ~ 230 ÷ 400 V	4.9	577-1KKK
CM 40/125 A	4	3	3 ~ 230 ÷ 400 V	6.5	577-2KKK
CM 40/160 B	4	3	3 ~ 230 ÷ 400 V	6.8	574-4KKK
CM 40/160 A	5.5	4	3 ~ 230 ÷ 400 V	8.8	574-5KKK
CM 40/200 B	7.5	5.5	3 ~ 400 ÷ 690 V	11.4	574-6KKK
CM 40/200 A	10	7.5	3 ~ 400 ÷ 690 V	15.1	575-1KKK
CM 40/250 C	12.5	9.2	3 ~ 400 ÷ 690 V	18.0	576-7KKK
CM 40/250 B	15	11	3 ~ 400 ÷ 690 V	23.3	574-9KKK
CM 40/250 A	20	15	3 ~ 400 ÷ 690 V	29.1	575-0KKK