




SURFACE MOUNTED PUMPS

CM DIN 24255

Dimensions (mm)				
DN	D	K	Holes n°	Dia.
32	140	100	4	18
40	150	110	4	18
50	165	125	4	18
65	185	145	4	18
80	200	160	8	18
100	220	180	8	18
125	250	210	8	18








Model		Dimensions (mm)															Weight Kg													
		DNM	DNA	A	H ₁	H ₂	M ₁	M ₂	N ₁	N ₂	D	E	Ø	B	C	H														
CM 32/160	C	32	50	80	132	160	100	70	240	190	50	12	14	490	240	292	41													
	B																44													
	A																47													
CM 32/200	C															505	268	340	57											
	B			160	180			72																						
	A							79																						
CM 32/250	C					100	180	225	125	95	320	250		65	14	625	305	405	102											
	B																		106											
	A																		136											
CM 40/125	C	40	65	80	112	140	100	70	210	160	50	12	14	495	220	252	42													
	B																44													
	A																48													
CM 40/160	B						132	160			240	190				500	245	292	52											
	A																	57												
	B									265	212				590	273	340	75												
CM 40/200	B					100	160	180							15	630	322	405	101											
	A																		81											
	B																													
CM 40/250	B				180	225	125	95	320	250	65		700				135													
	A																													
CM 50/125	B	50	65	100	132	160	100	70	240	190	50	12	14	525	250	292	54													
	A																													
	B																													
CM 50/160	B						160	180								590	270	340	75											
	A																		81											
	C									265	212									90										
CM 50/200	B						160	200								635	290	360	103											
	A																		133											
	C															705			139											
CM 50/250	B				180	225	125	95	320	250	65	14	750	332	405	154														
	A															164														
CM 65/125	B	65	80	100	160	180	125	95	280	212	65	14	14	605	280	340	77													
	A																													
	C																													
CM 65/160	B						200								635	290	360	100												
	A																	104												
	C														705			135												
CM 65/200	B						180	225			320	250			750	330	405	139												
	A																	153												
	C																	164												
CM 65/250	B				200	250	160	120	360	280	80	16	19	850	370	450	204													
	A															226														
CM 80/160	D	80	100	125	180	225	125	95	320	250	65	14	14	665	330	405	114													
	C													735			143													
	B																	158												
CM 80/200	A																					780			168					
	B																	345	280		16	870	355		200					
	A																								222					
CM 100/160 CM 100/160	B	100	125	125	200	280	160	120	360	280	80	18	18	842	390	480	208													
	A																												231	

SURFACE MOUNTED PUMPS

CM 65

E

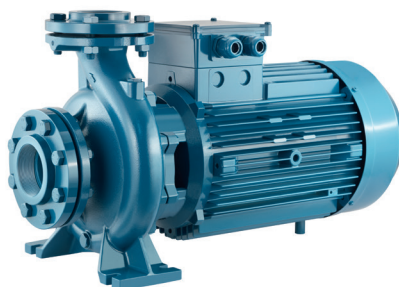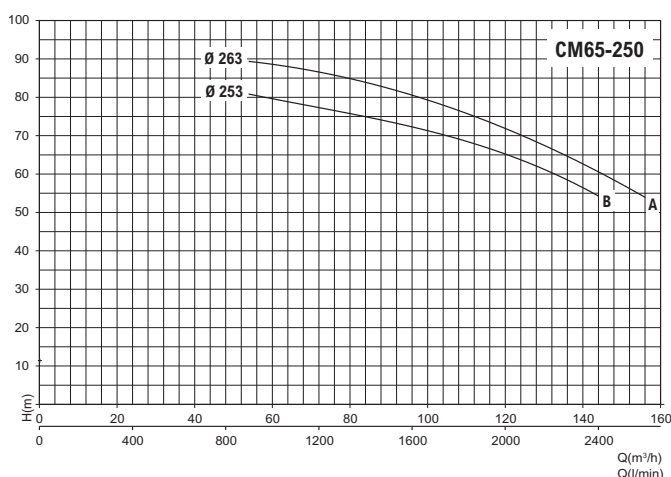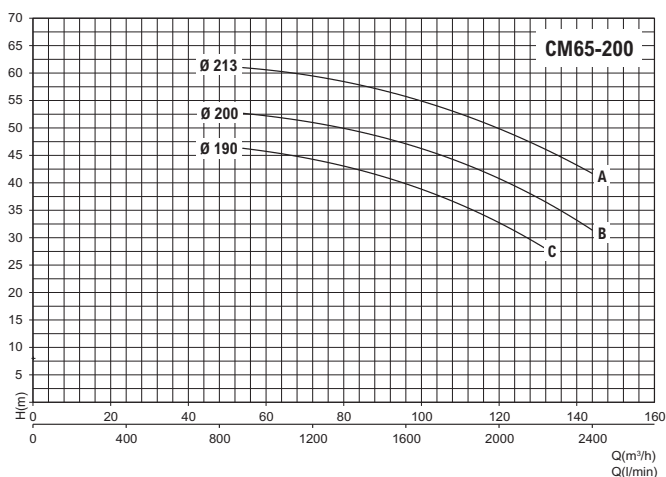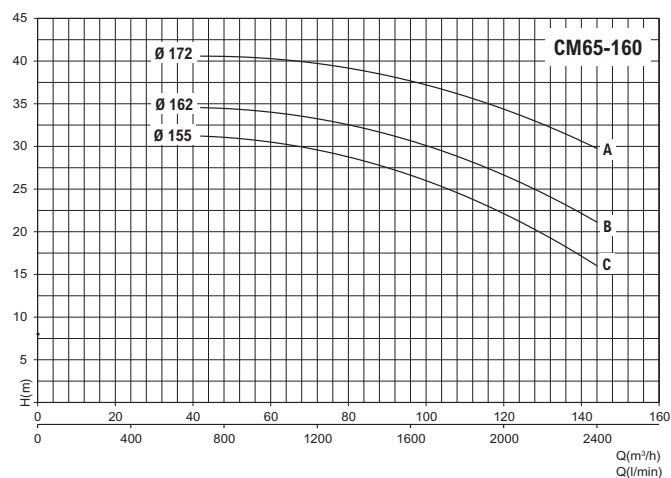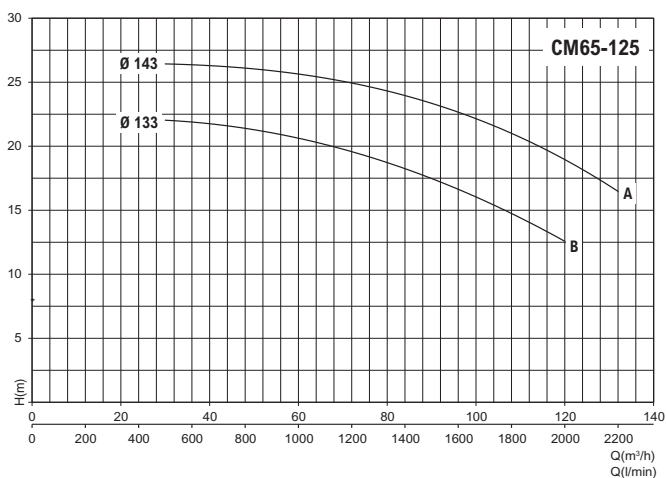

MODEL	MOTOR POWER		VOLTAGE	AMP 3 x 400 V	CODE
	HP	Kw			
CM 65/125 B	7.5	5.5	3 ~ 400 ÷ 690 V	11.0	577-6KKK
CM 65/125 A	10	7.5	3 ~ 400 ÷ 690 V	14.4	577-7KKK
CM 65/160 C	12.5	9	3 ~ 400 ÷ 690 V	16.8	576-1KKK
CM 65/160 B	15	11	3 ~ 400 ÷ 690 V	20.6	576-2KKK
CM 65/160 A	20	15	3 ~ 400 ÷ 690 V	28.5	576-3KKK
CM 65/200 C	20	15	3 ~ 400 ÷ 690 V	28.3	576-4KKK
CM 65/200 B	25	18.5	3 ~ 400 ÷ 690 V	34.8	576-5KKK
CM 65/200 A	30	22	3 ~ 400 ÷ 690 V	41.7	576-6KKK
CM 65/250 B	40	30	3 ~ 400 ÷ 690 V	55.3	577-8KKK
CM 65/250 A	50	37	3 ~ 400 ÷ 690 V	69.2	577-9KKK