

# SUBMERSIBLE PUMPS

(NOCCHI)

PENTAIR FLOTEC COMPAC

E



The Compac range are for clean water, designed to drain domestic applications and ideal for limited spaces. Complete with integral float switch, which can be selected in automatic or manual mode. In automatic mode the pump switches on when the water level reaches approx 140mm and switches off at approx 30mm. In manual mode the level of water can be pumped down to approx 3mm. Supplied with check valve and a 1 1/4" adjustable hose connector for hose sizes 3/4" 1" & 1 1/4". Complete with 10 metres of power cable. For low level control see page 90.

**Features**

- Polypropylene Pump Body
- Noryl Impeller
- Max Solids 5mm

**Applications**


- Domestic Duty / Light Commercial
- Clean Water
- Residue Water
- Nuisance Water

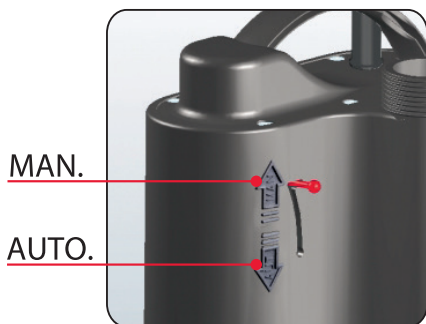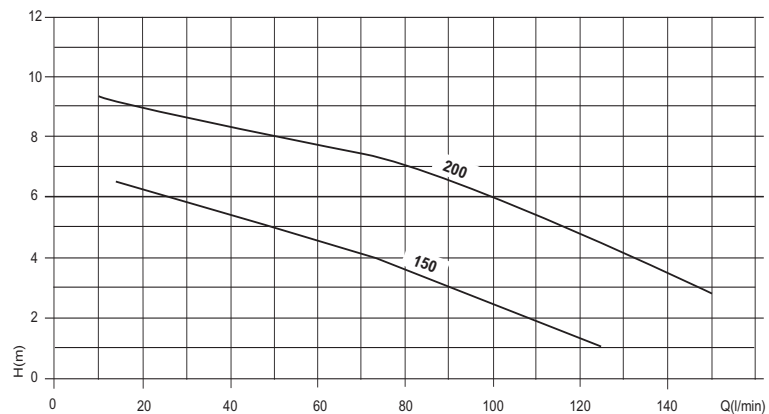

Automatic and manual code.



Integrated automatic floating switch. Draining level: 3mm with manual mode.

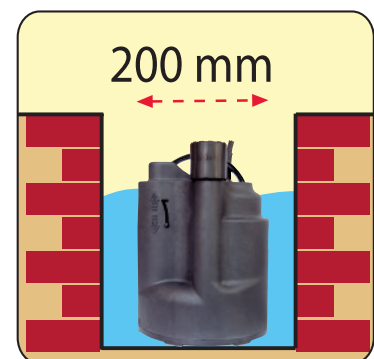

Ideal for limited space.

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE
COMPAC 150	230v	1 1/4"	140/7	0.3	1.5	280 x 170 x 200	4.7	020-090
COMPAC 150	110v	1 1/4"	140/7	0.3	2.7	280 x 170 x 200	4.7	020-092
COMPAC 200 (DPC200)	230v	1 1/4"	190/10	0.65	2.9	280 x 170 x 200	5.6	020-094