

## SURFACE MOUNTED PUMPS

### PENTAX ULTRA S WRAS APPROVED CENTRIFUGAL PUMPS

**E**


Ultra S multistage pumps produce high flow and pressure in performance. Not self priming and should not be allowed to run dry. Stainless steel impeller, diffusers and pump body. Clean water only with no solids or abrasives. Examples of use include water pressure booster systems, drinking water, washing and irrigation.

#### Features

WRAS Approved  
High Pressure  
High Flow

#### Applications

Drinking Water  
Water Boosting  
Booster Sets

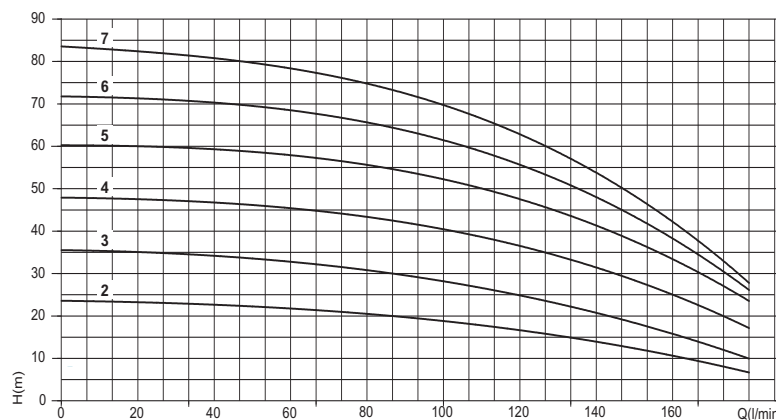

| MODEL       | VOLTAGE | INLET/OUTLET | LM/HM  | Kw   | AMP  | H x W x L mm    | Kg   | CODE      |
|-------------|---------|--------------|--------|------|------|-----------------|------|-----------|
| U 7S-100/2  | 230v    | 1¼" x 1"     | 180/23 | 0.75 | 4.1  | 203 x 178 x 356 | 10.6 | 1000-1425 |
| U 7S-120/3  | 230v    | 1¼" x 1"     | 180/35 | 0.9  | 5.5  | 203 x 178 x 356 | 11.6 | 1000-1435 |
| U 7S-180/4  | 230v    | 1¼" x 1"     | 180/48 | 1.3  | 7.7  | 211 x 201 x 411 | 15.0 | 1000-1445 |
| U 7S-250/5  | 230v    | 1¼" x 1"     | 180/60 | 1.85 | 10.2 | 211 x 201 x 436 | 17.3 | 1000-1455 |
| U 7S-300/6  | 230v    | 1¼" x 1"     | 180/72 | 2.2  | 11.4 | 229 x 201 x 503 | 20.0 | 1000-1465 |
| U 7S-100/2T | 400v    | 1¼" x 1"     | 180/23 | 0.75 | 1.6  | 211 x 201 x 459 | 10.6 | 1000-1430 |
| U 7S-120/3T | 400v    | 1¼" x 1"     | 180/35 | 0.9  | 2.5  | 203 x 178 x 356 | 11.6 | 1000-1440 |
| U 7S-180/4T | 400v    | 1¼" x 1"     | 180/48 | 1.3  | 3.1  | 211 x 201 x 411 | 15.0 | 1000-1450 |
| U 7S-250/5T | 400v    | 1¼" x 1"     | 180/60 | 1.85 | 4.1  | 211 x 201 x 436 | 17.3 | 1000-1460 |
| U 7S-300/6T | 400v    | 1¼" x 1"     | 180/72 | 2.2  | 4.8  | 211 x 201 x 459 | 20.0 | 1000-1470 |
| U 7S-350/7T | 400v    | 1¼" x 1"     | 180/80 | 2.57 | 5.1  | 229 x 201 x 527 | 20.7 | 1000-1480 |